

简介 General Description

AQF安全阀适用于工作压力为0.5MPa和0.8MPa的稀有润滑系统, 调定溢流阀压力后使系统的压力不致超载, 从而保证系统工作的安全, 适用工作介质的粘度等级为N22~N46, 小通径 ($DN \leq 40$) 用调节螺栓调整压力, 较大通径 ($DN \sim DN100$) 者用手轮调整压力。

AQF safety valve was applied to rare lubricating system under working pressure at 0.5MPa and 0.8MPa. Adjusting the pressure on over flow valve to have system's pressure not overloading in order to make sure the safety of system working. The viscosity degree for suitable actuating medium is N22~N46. For little channel ($DN \leq 40$) Adjust the pressure through adjusting bolt while adjust the pressure manually for bigger channel ($DN50 \sim DN100$).




型号说明 Order Code

公称通径为50, 调定压力为0.2~0.8MPa的安全阀:

AQF-E50/0.8安全阀 JB/ZQ4592-97

外形尺寸图 Outline Dimension

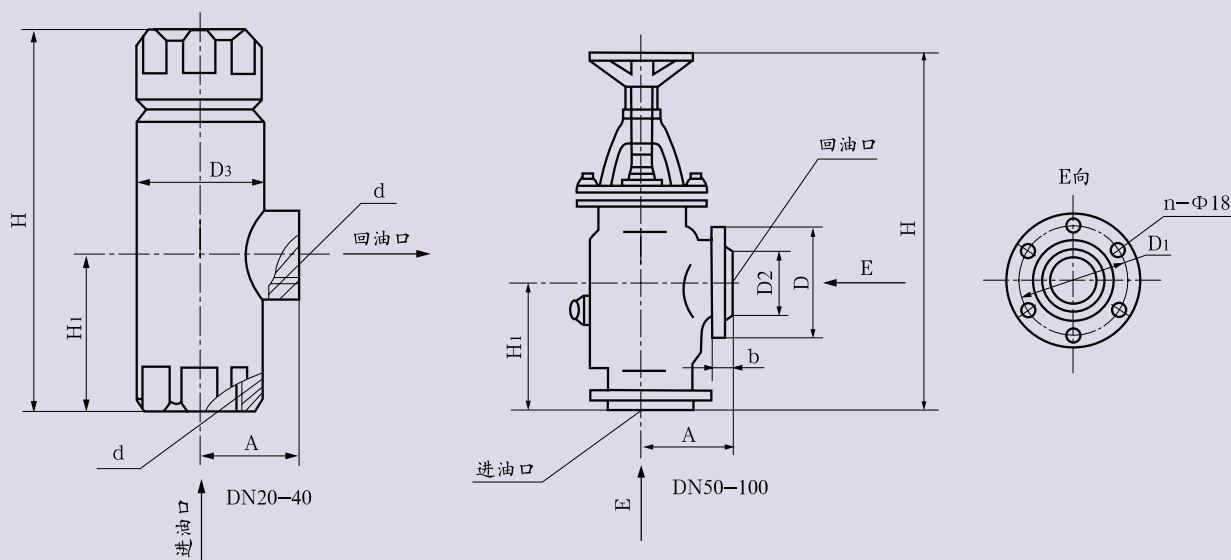

技术参数 Technical Data

型 号 Model	公称通径 Standard Pressure DN	公称压力 Standard Pressure MPa	额定压力 Rated Pressure MPa	d	H	H1	A	法 兰 尺 寸					D3	重 量 Weight kg	
								D	D1	D2	b	n			
AQF—E20/0.5	20	0.8	0.2—0.5	G 3/4"	140	56	35.5	—	—	—	—	—	45	1.2	
AQF—E20/0.8			0.4—0.8					—	—	—	—	—			
AQF—E25/0.5	25		0.2—0.5	G 1"	165	70	40	—	—	—	—	—	50	1.6	
AQF—E25/0.8			0.4—0.8					—	—	—	—	—			
AQF—E32/0.5	32		0.2—0.5	G 1 1/4"	194	88	48	—	—	—	—	—	60	2.8	
AQF—E32/0.8			0.4—0.8					—	—	—	—	—			
AQF—E40/0.5	40		0.2—0.5	G 1 1/2"	194	88	52	—	—	—	—	—	60	2.6	
AQF—E40/0.8			0.4—0.8					—	—	—	—	—			
AQF—E50/0.8	50		0.2—0.8			420	110	110	165	125	100	18	4	—	15
AQF—E80/0.8	80				485	125	125	200	160	135	18	8	—	23	
AQF—E100/0.8	100				540	155	135	220	180	155	18	8	—	31	

备注 Addition 法兰连接尺寸按JB/T81-94《不面板式平焊钢制管法兰》中PN=1.6MPa的规定。