

BB-B※Y series of cycloid gear oil pump


简介 General Description



BB-B※Y型摆线齿轮油泵的整个泵组结构紧凑, 油泵自带安全阀, 省却了管道连接, 所以密封可靠, 特别适用于滤油车。另外摆线齿轮油泵电机泵组配套也可作为其它低压输油设备的动力源或润滑和冷却。




BB-B※Y because of compact structur, safety valve, it eliminates the need for the pipeline connection. So it is sealed and reliable, especially for oil filtering Car. Motor matching pump group can also be used for other low-voltage oil equipment, power source or lubrication and cooling.

型号说明 Order Code

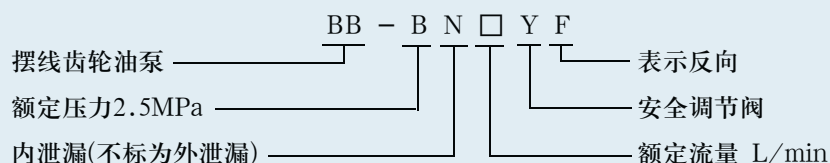

外形尺寸图 Outline Dimension

技术参数 Technical Data



型 号 Model	流 量 Flow L/min	使用压力 Using Pressure MPa	安全阀调定压力 Setting Pressure of Safety Valve MPa	吸入高度 Inhale Height mm	电 动 机 Electromotor		
					型 号 Model	功率 Power kw	转速 Speed r/min
BB—B4Y	4	0.5	0.63	500	JW6324	0.25	1450
BB—B6Y	6						
BB—B10Y	10						
BB—B16Y	16					JW7114	
BB—B25Y	25				JW7124	0.55	
BB—B40Y	40				Y802—4	0.75	
BB—B50Y	50				Y90S—4	1.1	
BB—B63Y	63						
BB—B63Y ₁	63						
BB—B63Y ₂	63				Y90L—4	1.5	
BB—B80Y	80						
BB—B100Y	100						
BB—B125Y	125				Y100L ₁ —4	2.2	
BB—B125Y ₁	125						
BB—B125Y ₂	125						

技术规格 Technical Size

型 号 Model	外 形 尺 寸							Outline Dimension							
	A	B	E	F	H	N	L	D	d	Φ	b	M	C	K ₁	K ₂
BB—B4Y	50	72	25	30	92	2	107	Φ35 (f9)	Φ12 (f7)	Φ50	4	M6	36	Z 3/8"	
BB—B6Y	55						112								
BB—B10Y	64						121								
BB—B16Y	72	95	30	34.5	117	3	137	Φ50 (f9)	Φ16 (f7)	Φ65	5	M8	50	Z 3/4"	
BB—B25Y	81						146								
BB—B40Y	85						155								
BB—B50Y	90	110	32	37	134	4	160	Φ55 (f9)	Φ22 (f7)	Φ80	6	M8	60	Z1 "	Z 3/4"
BB—B63Y	97						167								
BB—B63Y ₁															
BB—B63Y ₂															
BB—B80Y	102	130	40	46	154	5	195	Φ70 (f9)	Φ30 (f7)	Φ95	8	M8	73	Z1 "	
BB—B100Y	109						202								
BB—B125Y	118						211								
BB—B125Y ₁															
BB—B125Y ₂															