

DXF model of one-way valve


简介 General Description

DXF型单向阀适用于公称压力为0.8MPa和0.8的稀有润滑系统，防止油液逆向流动，适用工作介质的粘度等级为N22~N460。


DXF one way valve was applied to rare lubricating system with nominal pressure at 0.8MPa and .Avoid oil to reverse flow.The viscosity degree for suitable actuating medium is N22-N46.



型号说明 Order Code

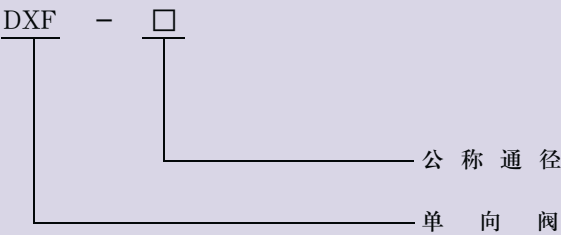

外形尺寸图 Outline Dimension

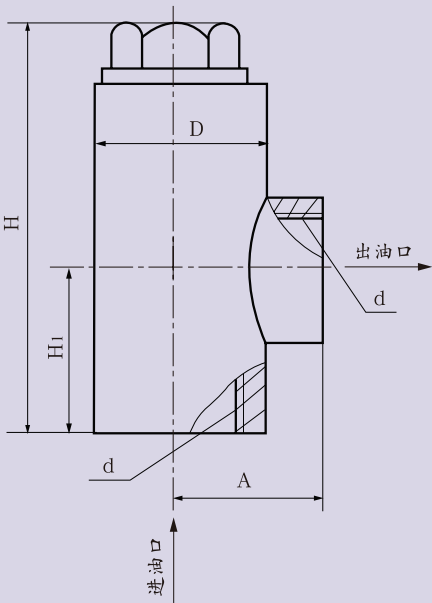

技术参数 Technical Data

型 号 Model	公称通径 Standard Pressure DN	公称压力 Standard Pressure MPa	d	D	H	H1	A	重 量 Weight kg
DXF-10	10	0.8	G 3/8"	40	100	30	35	1.2
DXF-15	15		G 1/2"	40	110	40	32	1.2
DXF-25	25		G 1"	50	115	45	40	1.8
DXF-32	32		G 1 1/4"	55	120	55	45	2.2
DXF-40	40		G 1 1/2"	60	120	55	52	2.4
DXF-50	50		G 2"	75	128	65	68	3.4