

简介 General Description

该油泵是CB-B系列齿轮油泵的改进产品,该泵的特点是结构紧凑,安装方便,能插入机械设备的某个传动部件或电机的主轴内。具有同轴度好、摩擦系数小、运转平稳。广泛应用于带锯床、机床的液压系统,减速机的润滑使用。




This is an improved products of CB-B series of gear oil pump and its' distinct characteristics consists in structure compact,easy installing.It can be inserted into certain transmission parts or motor spindle.This product is in good coaxiality,low friction coefficient and can run smoothly,which is widely applied to lubricating usage for band sawing machine,hydraulic system of machine tools and gear reducer.

型号说明 Order Code



外形尺寸图 Outline Dimension

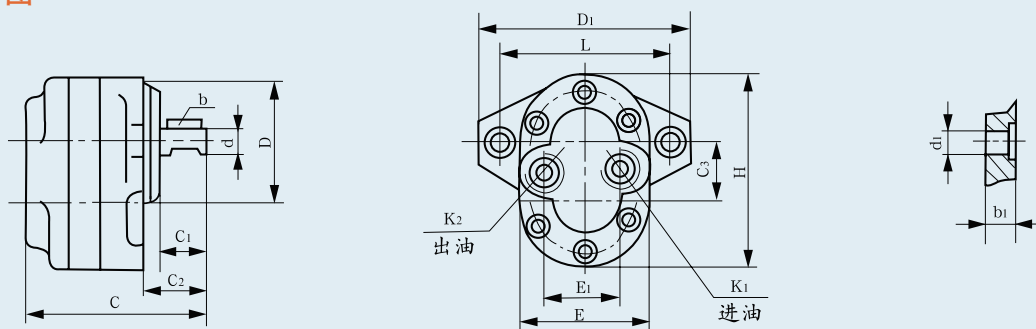

技术参数 Technical Data

型 号 Model	额定流量 Rated Flow L/min	排 量 Displacement mL/r	压 力 Pressure MPa	转 速 Speed r/min	效 率 Efficiency η%	功率 Power kw	进出口 Oil Inlet And Outlet		C	C1	C2	d	b	D	L	d1	b1	E1
	进油 k 1 Inlet Oil	出油 k 2 Outlet Oil																
HYCB—B2.5	2.5	2	2.5	1450	≥75	0.55	Z ³ / ₈ "	Z ³ / ₈ "	74	21	25	Φ 12	4	Φ 63	100	9	9	35
HYCB—B4	4	3			78													
HYCB—B6	6	4			82													
HYCB—B10	10	7			90													
HYCB—B16	16	11			≥85	2.2	Z ³ / ₄ "	Z ³ / ₄ "	107	30	35	Φ 16	5	Φ 80	109	11	11	50
HYCB—B20	20	14							111									
HYCB—B25	25	17							115									
HYCB—B32	32	22							121									
HYCB—B40	40	28			≥88	5.5	Z 1 "	Z ³ / ₄ "	132	35	40	Φ 22	6	Φ 90	140	14	14	55
HYCB—B50	50	35							138									
HYCB—B63	63	45							144									

备注 Addition

1. 本厂可根据客户要求将油泵轴改为双扁势,方便连接。
2. 本厂也可根据客户要求将进出油口改在两侧。