


简介 General Description




多片式双向润滑油泵国内首创，它的主要特点是泵轴在正向、反向旋转时都能在一个方向等量供油，体积小、外观美、重量轻、噪音低、使用寿命，适用于正反向旋转时都需要供油的润滑系统，特别适用于出口车床。出口减速机。（是各车床、减速机的专用油泵）

Multi-plate both-orientation lubricating oil pump is researched in domestic, whose main characteristic is that when pump shaft rotates from both positive or negative orientation, the oil supplying can be equal, small size, beautiful appearance, light weight, low noise, long using life, be applicable for lubricating oil system of supplying oil when rotating from both directions, So its especially suitable for exported lathe, exported redactor (is the specialized oil pump of every lathe and redactor.)

外形尺寸图 Outline Dimension

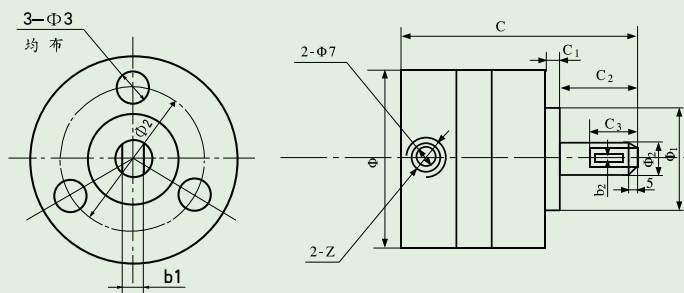

型号说明 Order Code

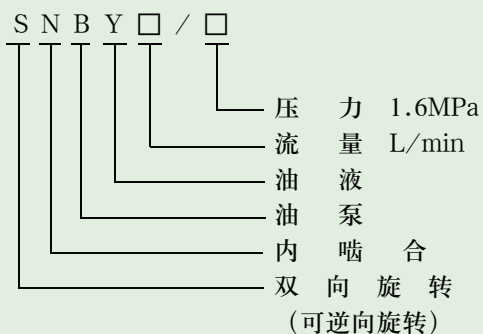

技术规格 Technical Size

型号 Model	C	C ₁	C ₂	C ₃	Φ	Φ ₁	Φ ₂	b	Φ ₃	Φ ₄	Z
SNBY0.84/1.6	72	20	20	12	Φ65	Φ36	Φ8	5	Φ7	Φ53	ZG 1/4"
SNBY2.5/1.6	80	16	19	12	Φ73	Φ36	Φ8	5	Φ7	Φ55	M14X1.5
SNBY2.5/1.6	76	20	14	12	Φ72	Φ36	Φ8	★	Φ7	Φ52	Z 1/4"
SNBY2.5/1.6	92	21	24	12	Φ64	Φ42	Φ12	4.2	Φ7	Φ52	M14X1.5
SNBY2.5/1.6	125	25	45	10	Φ80	Φ35	Φ12	5	Φ7	Φ55	M14X1.5
SNBY2.5/1.6	83	20	15	12	Φ73	Φ36	Φ8	3X10	Φ7	Φ52	Z 1/4"
SNBY2.5/1.6	80	16	19	12	Φ73	Φ30	Φ8	★	Φ7	Φ55	Z 1/4"
SNBY5/1.6	93	5	25	16	Φ90	Φ35	Φ12	★	Φ9	Φ72	Z 3/8"
SNBY16/1.6	105	5	25/38	12	Φ120	Φ35	Φ12	★	Φ9	Φ100	Z 3/8"
SNBY25/1.6	121	5	30	21	Φ120	Φ50	Φ16	★	Φ9	Φ100	Z 3/4"
SNBY5/1.6-A	98	5	30	16	Φ90	Φ74	Φ12	★	6-Φ9	Φ108	进RC 1/2" 出RC 3/8"
SNBY16/1.6-A	106	5	25	18	Φ120	Φ74	Φ14	★	6-Φ11	Φ140	进RC 3/4" 出RC 1/2"
SNBY25/1.6-A	126	5	25	21	Φ120	Φ74	Φ16	★	6-Φ11	Φ140	进RC 3/4" 出RC 3/4"

备注 Addition

1. 泵的吸油高度应低于500毫米。
2. SNBY16/1.6泵轴长度为25是四片式，泵轴长度为38是三片式。
3. 凡有★SNBY5/1.6平键为4×12, SNBY16/1.6平键为4×6, SNBY25/1.6平键为5×16。